CONTRACT PROVISIONS AND PLANS

For Construction of:

PIERT ROAD

CID CANAL REALIGNMENT
CE 1619 CRP

Benton County, Washington

BENTON COUNTY
DEPARTMENT OF PUBLIC WORKS

OFFICE OF THE COUNTY ENGINEER
BENTON COUNTY

NOTICE TO ALL PLANHOLDERS:

Sealed bids for C.E. 1619 CRP – Piert Road - CID Canal Realignment shall be received by the Benton County Engineer, Benton County Courthouse, 620 Market St., P. O. Box 1001, Prosser, Washington 99350-0954 until 1:30 p.m., Local Time, Monday, October 24, 2011. NO BIDS WILL BE ACCEPTED AFTER THAT DATE AND TIME. Bids are to be opened on Monday, October 24, 2011, at 2:00 p.m., Local Time, in the Public Works Conference Room, Benton County Courthouse, 620 Market St., Prosser, Washington. Contractor's Bid Proposal shall include the complete Proposal, consisting of five (5) pages, and Proposal Bond, and be enclosed in a sealed envelope marked, "BID FOR PIERT ROAD - CID CANAL REALIGNMENT".

"NOTE: This document and the materials enclosed herewith constitute an invitation to submit bid proposals only and do not represent an offer by Benton County or the Benton County Engineer. Bid proposals submitted in response hereto shall constitute offers to contract with Benton County, and only upon the County's acceptance of such offer by bid award as provided herein, shall any contractual relations be created."

All bid proposals shall be accompanied by a bid proposal deposit in cash, certified check, cashier check or proposal bond in an amount equal to five percent (5%) of the amount of such bid proposal. Should the successful bidder fail to enter into such contract and furnish satisfactory performance bond within the time stated in the specifications, the bid proposal deposit shall be forfeited to Benton County. The Board reserves the right to reject any or all bids and to waive informalities in the bidding. The award of contract, if made, will be approved by the Board of Benton County Commissioners, Benton County, Washington.

Informational copies of maps, plans, and specifications are on file for inspection in the Office of the County Engineer, Benton County Courthouse, Prosser, Washington. The complete set of bid documents may be purchased at a non-refundable cost of $25.00. Personnel of the County Engineer's Office will show this job to all prospective bidders upon request. The Engineer's Office can be reached at telephone number (509)786-5611 or (509)736-3084.

ENGINEER'S CERTIFICATION

As the Engineer in direct responsible charge of developing these contract provisions, I certify these provisions have been developed or incorporated into this project under my supervision or as a result of certified specifications provided by other licensed professionals.

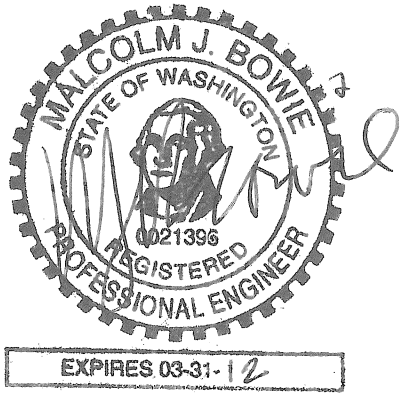

INDEX TO PROJECT PROVISIONS

AMENDMENTS TO THE STANDARD SPECIFICATIONS

PAGE

INTRODUCTION 1

SECTION 1-01, DEFINITIONS AND TERMS
August 2, 2010 1

SECTION 1-02, BID PROCEDURES AND CONDITIONS
July 11, 2011 ..... 1 - 5

SECTION 1-06, CONTROL OF MATERIALS
January 3, 2011 ..... 5 - 7

SECTION 1-07, LEGAL RELATIONS AND RESPONSIBILITIES TO THE PUBLIC
August 1, 2011 ..... 7 - 16

SECTION 1-08, PROSECUTION AND PROGRESS
April 4, 2011 ..... 16 - 17

SECTION 1-09, MEASUREMENT AND PAYMENT
August 1, 2011 ..... 17 - 21

SECTION 1-10, TEMPORARY TRAFFIC CONTROL
April 4, 2011 ..... 22 - 25

SECTION 2-01, CLEARING, GRUBBING, AND ROADSIDE CLEANUP
April 5, 2010 25

SECTION 2-02, REMOVAL OF STRUCTURES AND OBSTRUCTIONS
January 4, 2010 25

SECTION 2-09, STRUCTURE EXCAVATION
January 3, 2011 ..... 25 - 26

SECTION 6-01, GENERAL REQUIREMENTS FOR STRUCTURES
August 1, 2011 26

SECTION 6-02, CONCRETE STRUCTURES
August 1, 2011 ..... 26 - 36

SECTION 7-02, CULVERTS
January 3, 2011 ..... 36 - 37

SECTION 8-01, EROSION CONTROL AND WATER POLLUTION CONTROL
August 1, 2011 ..... 37 - 42

AMENDMENTS TO THE STANDARD SPECIFICATIONS
Cont.

PAGE

SECTION 8-03, IRRIGATION SYSTEMS
January 4, 2010 ..... 42 - 47

SECTION 8-15, RIPRAP
January 4, 2010 48

SECTION 9-01, PORTLAND CEMENT
April 5, 2010 48

SECTION 9-05, DRAINAGE STRUCTURES, CULVERTS, AND CONDUITS
August 1, 2011 ..... 48 - 52

SECTION 9-07, REINFORCING STEEL
August 1, 2011 52

SECTION 9-15, IRRIGATION SYSTEM
January 4, 2010 ..... 53 - 56

SPECIAL PROVISIONS

INTRODUCTION TO THE SPECIAL PROVISIONS 57

DIVISION 1, GENERAL REQUIREMENTS

DESCRIPTION OF WORK 58

SECTION 1-01, DEFINITIONS AND TERMS
1-01.3, DEFINITIONS ..... 58 - 60

SECTION 1-02, BID PROCEDURES AND CONDITIONS
1-02.1, PREQUALIFICATION OF BIDDERS 60
1-02.2, PLANS AND SPECIFICATIONS ..... 60 - 61
1-02.4, EXAMINATION OF PLANS, SPECIFICATIONS AND SITE OF WORK 61
1-02.5, PROPOSAL FORMS ..... 61 - 62
1-02.6, PREPARATION OF PROPOSAL 62
1-02.7, BID DEPOSIT 62
1-02.9, DELIVERY OF PROPOSAL ..... 62 - 63
1-02.10, WITHDRAWAL OR REVISION OF PROPOSAL 63
1-02.12, PUBLIC OPENING OF PROPOSALS 63
1-02.13, IRREGULAR PROPOSALS ..... 63 - 64
1-02.14, DISQUALIFICATION OF BIDDERS 64
1-02.15, PRE AWARD INFORMATION ..... 64 - 65

PAGE

SECTION 1-03, AWARD AND EXECUTION OF CONTRACT
1-03.1, CONSIDERATION OF BIDS 65
1-03.3, EXECUTION OF CONTRACT ..... 65 - 66
1-03.4, CONTRACT BOND ..... 66 - 67

SECTION 1.-04, SCOPE OF WORK
1-04.1, BID ITEMS NOT INCLUDED IN THE PROPOSAL 67
1-04.2, COORDINATION OF CONTRACT DOCUMENTS, PLANS, SPECIAL PROVISIONS, SPECIFICATIONS, AND ADDENDA 67
1-04.7, CHANGED CONDITIONS (DIFFERING SITE CONDITIONS) ..... 67 - 68

SECTION 1-05, CONTROL OF WORK
1-05.7, REMOVAL OF DEFECTIVE AND UNAUTHORIZED WORK 68
1-05.11, FINAL INSPECTION ..... 69 - 70
1-05.13, SUPERINTENDENTS, LABOR AND EQUIPMENT OF CONTRACTOR 70
1-05.15, METHOD OF SERVING NOTICES 70
1-05.17, ORAL AGREEMENTS 70

SECTION 1-06, CONTROL OF MATERIAL
1-06.1, SOURCE OF SUPPLY AND QUALITY OF MATERIALS 71

SECTION 1-07, LEGAL RELATIONS AND RESPONSIBILITIES TO THE PUBLIC
1-07.1, LAWS TO BE OBSERVED ..... 71 - 73
1-07.2, STATE TAXES ..... 73 - 74
1-07.9, WAGES ..... 75 - 76
1-07.17, UTILITIES AND SIMILAR FACILITIES 76
1-07.18, PUBLIC LIABILITY AND PROPERTY DAMAGE INSURANCE ..... 77 - 80
1-07.24, RIGHTS OF WAY ..... 80 - 81

SECTION 1-08, PROSECUTION AND PROGRESS
1-08.0, PRELIMINARY MATTERS ..... 81 - 82
1-08.4, NOTICE TO PROCEED AND PROSECUTION OF WORK ..... 82 - 83
1-08.5, TIME FOR COMPLETION ..... 83 - 84

SECTION 1-09, MEASUREMENT AND PAYMENT
1-09.9, PAYMENTS ..... 84 - 85
1-09.13, CLAIMS RESOLUTION 85

DIVISION 2, EARTHWORK

SECTION 2-01, CLEARING, GRUBBING, AND ROADSIDE CLEANUP
2-01.1, DESCRIPTION 86

SECTION 2-02, REMOVAL OF STRUCTURES AND OBSTRUCTIONS
2-02.3, CONSTRUCTION REQUIREMENTS 86
2-02.4, MEASUREMENT 87
2-02.5, PAYMENT 87

PAGE

SECTION 2-03, ROADWAY EXCAVATION AND EMBANKMENT
2-03.3, CONSTRUCTION REQUIREMENTS 87
2-03.4, MEASUREMENT 88

SECTION 2-07, WATERING
2-07.3, MEASURMENT 88
2-07.5, PAYMENT ..... 88 - 89

SECTION 2-09, STRUCTURE EXCAVATION
2-09.4, MEASUREMENT 89

DIVISION 6, STRUCTURES

SECTION 6-02, CONCRETE STRUCTURES
6-02.2, MATERIALS 89
6-02.3, CONSTRUCTION REQUIREMENTS 89
6-02.4, MEASUREMENT ..... 89 - 90
6-02.5, PAYMENT ..... 90 - 91

DIVISION 7, DRAINAGE STRUCTURES, STORM SEWERS, SANITARY SEWERS, WATER MAINS, AND CONDUITS

SECTION 7-02, CULVERTS
7-02.2, MATERIALS 91
7-02.4, MEASUREMENT 91
7-02.5, PAYMENT ..... 91 - 92

SECTION 7-08, GENERAL PIPE INSTALLATION REQUIREMENTS
7-08.2, MATERIALS 92
7-08.3, CONSTRUCTION REQUIREMENTS ..... 92 - 94
7-08.4, MEASUREMENT 94
7-08.5, PAYMENT ..... 94 - 95

DIVISION 8, MISCELLANEOUS CONSTRUCTION

SECTION 8-01, EROSION CONTROL AND WATER POLLUTION CONTROL
8-01.3, CONSTRUCTION REQUIREMENTS ..... 95 - 97
8-01.4, MEASUREMENT 97

SECTION 8-24, ROCK AND GRAVITY BLOCK WALL AND GABION CRIBBING
8-24.2, MATERIALS 97
8-24.4, MEASUREMENT 98
8-24.5, PAYMENT 98

PAGE

DIVISION 9, MATERIALS

SECTION 9-13, QUARRY SPALLS
9-13.6, QUARRY SPALLS 98

APPENDICES 98

STANDARD PLANS
August 1, 2011 ..... 99 - 104

REQUIRED CONTRACT PROVISIONS – STATE DEPARTMENT OF
LABOR AND INDUSTRIES 105

APPENDICES

APPENDIX A
WSDOT STANDARD PLANS
B-90.40-00
B-90.50-00

PROPOSAL, ETC.

PROPOSAL (5 Pages)
PROPOSAL BOND
PREVAILING MINIMUM HOURLY WAGE RATES – STATE OF WASHINGTON