


DIMENSIONS TABLE	RADIUS	MAX WIDTH
RESIDENTIAL	20'	30'
NON - RESIDENTIAL	50'	40'

NOTES:

- 1) DITCH BOTTOMS TO HAVE BALLAST COMP. IN PLACE, 3" MIN. DEPTH IF ROAD GRADE IS 5% OR STEEPER.
- 2) THE NEED FOR CORRUGATED METAL PIPE, SIZE, & LOCATION TO BE DETERMINED BY THE COUNTY ENGINEER.
- 3) NEAT VERTICAL SAW CUT & TACK EDGES OF EXISTING PAVEMENT.
- 4) APPROACH SHALL BE PAVED TO THE RIGHT OF WAY LINE OR 30' FROM CENTERLINE. WHICHEVER IS LESS.
- 5) CONCRETE ONLY ALLOWED FOR RESIDENTIAL APPROACHES ON ROADS 25 M.P.H. OR LESS. SEE APPROACH PERMIT POLICY.
- 6) DEPENDING ON THE SITUATION THE DIMENSIONS SHOWN HEREON MAY BE VARIED AS REQUIRED BY THE COUNTY ENGINEER.

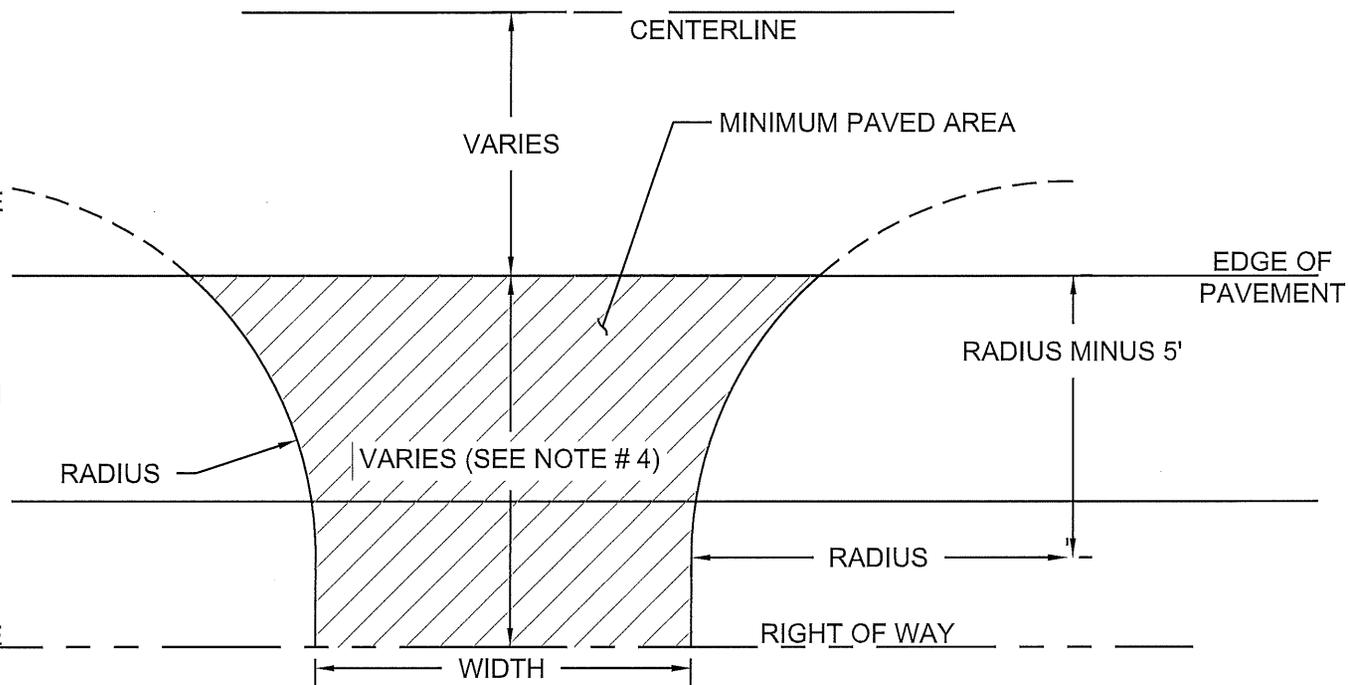

COUNTY ROAD APPROACH

APPROVED BY:

Naail S. Sel
 COUNTY ENGINEER

8-18-2015
 DATE

STANDARD PLAN

R-3

SHEET 1 OF 1